


PN32 BRONZE SCREWED GLOBE VALVE

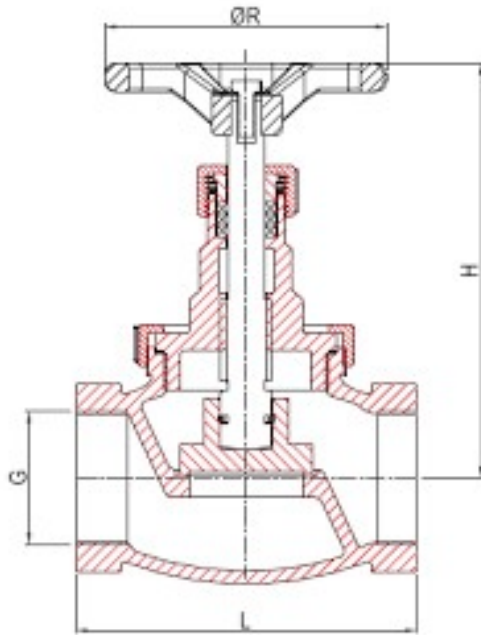

Suitable for 14 bar steam @ 200°C

Renewable SS trim with backseat

Max. Working Pressure: 21 bar

Hydraulic Test Pressure: 35 bar

Screwed BSP female, parallel threads

MATERIALS LIST

1	Body	Cast Bronze
2	Seat	SS303
3	Seat Check Nut	Brass
4	Bonnet	Cast Bronze
5	Gland Nut	Brass
6	Packing Sleeve	Brass
7	Spindle	DZR
8	Gland Packing	PTFE
9	Handwheel	Cast Iron

DIMENSIONS

DN (G)	L	H	R
15	58	90	61
20	67	100	78
25	78	117	83
32	88	130	93
40	102	147	105
50	124	166	115