


STRAIGHT-THRU TYPE C.I. SRL DIAPHRAGM VALVE
(NRS)

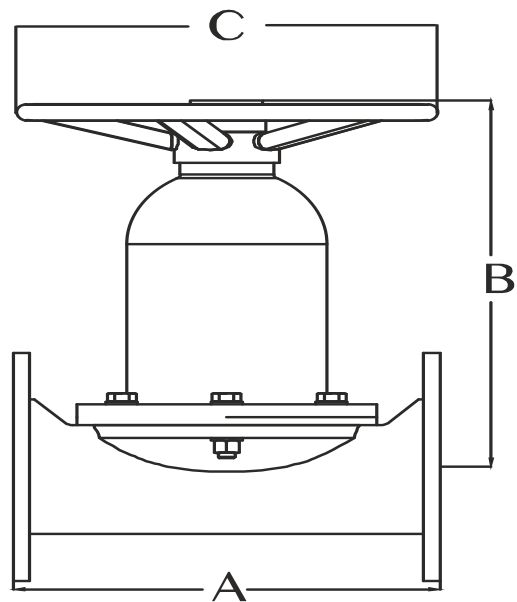

DESCRIPTION

- 1. Design and manufacture conforms to BS5156
- 2. Flange dimensions conform to BS4504 PN10
- 3. Working Pressure: DN50-DN100 1.0Mpa
DN125-DN150 0.6Mpa
DN200-DN300 0.35Mpa

MATERIALS LIST

NO.	PART	MATERIAL	STANDARD	QUANTITY
1	Body	Cast Iron	GG25	1
2	Body Liner	Natural rubber		1
3	Diaphragm	Natural rubber		1
4	Valve Clack	Cast Iron	GG25	1
5	Bonnet	Cast Iron	GG25	1
6	Stem	Stainless Steel	304SS	1
7	Bush	Plastic		2
8	Handwheel	Ductile Iron	GGG40	1
9	Pin	Carbon Steel		1
10	Bolt	Stainless Steel	304SS	4

DIMENSIONS

DN	A	B	C	*WEIGHT
50	196	230	85	15
65	222	200	100	20
80	260	303	250	23
100	311	324	315	28
125	362	305	300	50
150	412	470	615	65
200	527	640	400	110
250	641	745	500	185
300	755	635	600	420