

D&D Valve & Engineering Supplies (Pty) Ltd.

(+2711) 493-1842/3 (10 lines)

info@ddvalve.co.za

www.ddvalve.co.za

sales@ddvalve.co.za


316SS STRAINER

FEATURES:

- Face to face:DIN3202-M3
- Design Standard: ANSI B16.10
- Testing Standard: API 598,EN17266
- Working Pressure: 800psi
- Pipe Thread: ASME B1.20.1,BS21
DIN 259/2999,ISO 228/1
JIS B0203,ISO 7/1



NO.	PART NAME	MATERIAL
1	Cap End	CF8M
2	Filter Screen	SUS304
3	Cap Gasket	PTFE
4	Body	CF8M

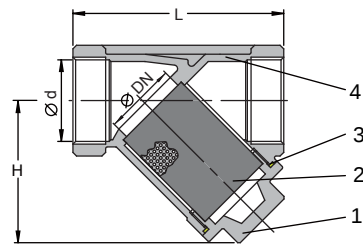

Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"
	DN8	DN10	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80
L	50	60	75	80	90	110	120	140	190	205
øDN	6	10	15	20	25	32	40	50	65	80
ød	6	10	15	20	25	32	40	50	65	80
H	42	42	45	51	63	70	75	100	105	110