

D&D Valve & Engineering Supplies (Pty) Ltd


(+2711) 493-1842/3 (8 lines)

sales@ddvalve.co.za

www.ddvalve.co.za

info@ddvalve.co.za

PN10 UNI-DIRECTIONAL KNIFE GATE VALVE

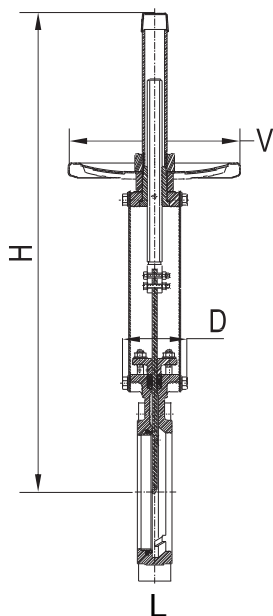

DESCRIPTION

1. Testing DIN3230, MSS-SP-81
2. Suitable temperature: EPDM $\leq 120^{\circ}\text{C}$
3. Optional - with pneumatic cylinder
4. Optional - PU deflector cones
(for slurry applications)

MATERIALS LIST

NO.	PART	MATERIAL	STANDARD
1	Body	Cast Iron	GG25
2	Gate	Stainless Steel	SS304
3	Seal	EPDM	
4	Packing	PTFE	

DIMENSIONS

DN	L	D	V	H	Kg
50	40	100	200	348	8
65	40	100	200	388	10
80	50	100	200	413	11
100	50	100	200	488	12
125	50	110	250	564	17
150	60	110	250	635	21
200	60	127	310	809	38
250	70	127	310	946	52
300	70	127	310	1118	63
350	96	290	500	1282	115
400	100	290	500	1441	145
450	106	290	500	1587	186
500	110	290	500	1809	221
600	110	290	500	2060	265